

10-11-00

A

10/10/00

jc917 PTO

**UTILITY  
PATENT APPLICATION  
TRANSMITTAL**

(Only for new nonprovisional applications under 37 CFR 1.53(b))

**ADDRESS TO:**Assistant Commissioner for Patents  
Box Patent Application  
Washington, D.C. 20231

Attorney Docket No. 52078.P6

First Named Inventor Brian M. Boling

Title EMERGENCY PHONE WITH ALTERNATE  
NUMBER CALLING CAPABILITY

Express Mail Label No. EL 585 143 920 US

jc781 U.S. PTO

09/684831

10/10/00

**APPLICATION ELEMENTS**

See MPEP Chapter 699 concerning utility patent application contents.

**ACCOMPANYING APPLICATION PARTS**

1. ☒ \* Fee Transmittal Form (e.g. PTO/SB/17)  
(Submit an original and a duplicate for fee processing)
2. ☒ Specification [Total Pages 29]
3. ☒ Drawing(s) (35 USC 113) [Total Pages 9]
4. Oath or Declaration [Total Pages 2]
- a. ☒ Newly executed (original or copy)
- b. ☐ Copy from a prior application (37 CFR 1.63(d))  
(for continuation/divisional with Box 16 completed)  
[Note Box 5 below]
- i. ☐ **DELETION OF INVENTOR(S)**  
Signed statement attached deleting  
inventor(s) named in the prior application,  
see 37 CFR 1.63(d)(2) and 1.33(b).
5. ☐ Incorporation by Reference (useable if Box 4b is  
checked) The entire disclosure of the prior application,  
from which a copy of the oath or declaration is supplied  
under Box 4b, is considered as being part of the  
disclosure of the accompanying application and is  
hereby incorporated by reference therein.
6. Nucleotide and/or Amino Acid Sequence Submission  
(if applicable, all necessary)
- a. ☐ Computer Readable Copy
- b. ☐ Paper Copy (identical to computer copy)
- c. ☐ Statement verifying identity of above copies)

7. ☒ Assignment Papers (cover sheet & document(s))
8. ☐ 37 CFR 3.73(b) Statement (when there is an assignee) ☐ Power of Attorney
9. ☐ English Translation Document (if applicable)
10. ☐ Information Disclosure Statement (IDS)/PTO-1449 ☐ Copies of IDS Citations
11. ☐ Preliminary Amendment
12. ☒ Return Receipt Postcard (MPEP 503)  
(Should be specifically itemized)
13. ☐ \* Small Entity Statement(s) (PTO/SB/09-12) ☒ Statement filed in  
prior application.  
Status still proper  
and desired.
14. ☐ Certified Copy of Priority Documents  
(if foreign priority is claimed)
15. ☐ Other:

\* NOTE FOR ITEMS 1 & 14: IN ORDER TO BE ENTITLED TO PAY SMALL  
ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27).  
EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R.  
§ 1.28).

**16. If a CONTINUING APPLICATION, check appropriate box and supply the requisite information below and in a preliminary amendment:**☐ Continuation ☐ Divisional ☒ Continuation-in-part (CIP) of prior application No.: 09/538,364

Prior application information: Examiner

Group / Art Unit: 2749

**18. CORRESPONDENCE ADDRESS**

Customer No. 000408

Name LUEDEKA, NEELY &amp; GRAHAM, P.C.

Address P.O. Box 1871

City/State Knoxville, TN 37901

Telephone 865/546-4305

Fax 865/523-4478

Name (Print/Type) Andrew S. Neely

Registration No. 28,979

Signature

Date October 10, 2000

# FEE TRANSMITTAL for FY 2000

Patent fees are subject to annual revision.  
Small Entity payments must be supported by a small entity statement,  
otherwise large entity fees must be paid. See Forms PTO/SB09-12.  
See 37 C.F.R. §§ 1.27 and 1.28.

Complete If Known

Application Number  
Filing Date October 10, 2000  
First Named Inventor Brian M. Boling  
Examiner Name  
Group / Art Unit  
Attorney Docket No. 52078.P6

TOTAL AMOUNT OF PAYMENT (\$) 395.

## METHOD OF PAYMENT (check one)

1. ☒ The Commissioner is hereby authorized to charge indicated fees and credit any over payments to:

Deposit Account No. 12-2355  
Deposit Account Name:  
LUEDEKA, NEELY & GRAHAM

☒ Charge any Additional Fee Required Under 37 CFR 1.16 and 1.17.

2. ☒ Payment Enclosed: Check No. 42750

## FEE CALCULATION

### 1. BASIC FILING FEE

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
101	710	201	355	Utility filing fee	355
106	320	206	160	Design filing fee	
107	490	207	245	Plant filing fee	
108	710	208	355	Reissue filing fee	
114	150	214	75	Provisional filing fee	
SUBTOTAL (1)					(\$)

### 2. EXTRA CLAIM FEES

Total Claims 20 - 20\*\* = 0 X 0 = 0  
Independent Claims 3 - 3\*\* = 0 X 0 = 0

Multiple Dependent Claims X =  
\*\*or number previously paid, if greater.

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
103	18	203	9	Claims in excess of 20	
102	80	202	40	Independent claims in excess of 3	
104	270	204	135	Multiple dependent claim	
SUBTOTAL (2)					(\$)

## FEE CALCULATION (continued)

### 3. ADDITIONAL FEES

Large Entity		Small Entity		Fee Description	Fee Paid
Fee Code	Fee (\$)	Fee Code	Fee (\$)		
105	130	205	65	Surcharge - late filing fee or oath	
127	50	227	25	Surcharge - late provisional filing fee or cover sheet	
139	130	139	130	Non-English specification	
115	110	215	55	Extension for reply within first month	
116	380	216	190	Extension for reply within second month	
117	870	217	435	Extension for reply within third month	
118	1,360	218	680	Extension for reply within fourth month	
128	1,850	228	925	Extension for reply within fifth month	
119	300	219	150	Notice of Appeal	
120	300	220	150	Filing a brief in support of appeal	
121	260	221	130	Request for oral hearing	
138	1,510	138	1,510	Petition to institute a public use proceeding	
140	110	240	55	Petition to revive - unavoidable	
141	1,210	241	605	Petition to revive - unintentional	
142	1,210	242	605	Utility issue fee (or reissue)	
143	430	243	215	Design issue fee	
144	580	244	290	Plant issue fee	
122	130	122	130	Petitions to the Commissioner	
123	50	123	50	Petitions relating to provisional applications	
126	240	126	240	Submission of Information Disclosure Statement	
581	40	581	40	Recording each patent assignment per property (times number of properties)	40
146	760	246	380	Filing a submission after final rejection (37 CFR 1.129(a))	
Other fee (specify)					
*Reduced by Basic Filing Fee Paid					
SUBTOTAL (3)					(\$)

## SUBMITTED BY

Typed or Printed Name Andrew S. Neely Registration No. 28,979  
Signature Date October 10, 2000

**VERIFIED STATEMENT CLAIMING SMALL ENTITY STATUS.  
(37 CFR 1.9(f) & 1.27(c))--SMALL BUSINESS CONCERN**

Docket Number  
52078.P5

Applicant or Patentee: **Brian M. BOLING et al.**

Application or Patent No.:

Filed or Issued:

Title: **EMERGENCY PHONE WITH SINGLE-BUTTON ACTIVATION**

I hereby declare that I am

☐ the owner of the small business concern identified below:

☒ an official of the small business concern empowered to act on behalf of the concern identified below:

NAME OF SMALL BUSINESS CONCERN: **AMERICAN SECURE CARE, LLC**

ADDRESS OF SMALL BUSINESS CONCERN: **109 David Lane, Knoxville, TN 37922**

I hereby declare that the above-identified small business concern qualifies as a small business concern as defined in 13 CFR 121.12, and reproduced in 37 CFR 1.9(d), for purposes of paying reduced fees to the United States Patent and Trademark Office, in that the number of employees of the concern, including those of its affiliates, does not exceed 500 persons. For purposes of this statement, (1) the number of employees of the business concern is the average over the previous fiscal year of the concern of the persons employed on a full-time, part-time or temporary basis during each of the pay periods of the fiscal year, and (2) concerns are affiliates of each other when either, directly or indirectly, one concern controls or has the power to control the other, or a third party or parties controls or has the power to control both.

I hereby declare that rights under contract or law have been conveyed to and remain with the small business concern identified above with regard to the invention described in:

☒ the specification filed herewith with title as listed above.

☐ the application identified above.

☐ the patent identified above.

If the rights held by the above-identified small business concern are not exclusive, each individual, concern or organization having rights in the invention must file separate verified statements averring to their status as small entities, and no rights to the invention are held by any person, other than the inventor, who would not qualify as an independent inventor under 37 CFR 1.9(c) if that person made the invention, or by any concern which would not qualify as a small business concern under 37 CFR 1.9(d), or a nonprofit organization under 37 CFR 1.9(e).

Each person, concern or organization having any rights in the invention is listed below:

☒ no such person, concern or organization exists.

☐ each such person, concern or organization is listed below.

Separate verified statements are required for each named person, concern or organization having rights to the invention averring to their status as small entities. (37 CFR 1.27)

I acknowledge the duty to file, in this application or patent, notification of any change in status resulting in loss of entitlement to small entity status prior to paying, or at the time of paying, the earliest of the issue fee or any maintenance fee due after the date on which status as a small entity is no longer appropriate. (37 CFR 1.28(b))

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under § 1001 of Title 18 of the United States Code, and that such willful false statements may jeopardize the validity of the application, any patent issuing thereon, or any patent to which this verified statement is directed.

NAME OF PERSON SIGNING: Brian M. Boling

TITLE OF PERSON IF OTHER THAN OWNER: Managing Member

ADDRESS OF PERSON SIGNING: 109 David Lane Knoxville, TN 37922

SIGNATURE B. M. Boling DATE 3-09-00

APPLICATION

of

BRIAN M. BOLING,

MICHAEL C. BERNSTEIN

and

NICHOLAS A. NATALE

for

LETTERS PATENT OF THE UNITED STATES

for

EMERGENCY PHONE WITH ALTERNATE NUMBER CALLING CAPABILITY

**AMERICAN SECURE CARE, LLC**

LUEDEKA, NEELY & GRAHAM, P.C.  
P.O. Box 1871  
Knoxville, Tennessee 37901  
Telephone: (865) 546-4305

## EMERGENCY PHONE WITH ALTERNATE NUMBER CALLING CAPABILITY

This application is a continuation-in-part of co-pending patent application Serial No. 09/538,364, filed March 29, 2000, entitled PANIC BUTTON PHONE WITH SINGLE-BUTTON ACTIVATION, which is a continuation-in-part of patent application Serial No. 09/495,080, filed  
5 January 31, 2000, entitled PANIC BUTTON PHONE, which is a continuation of patent application Serial No. 09/044,497, filed March 19, 1998, which issued as U.S. Patent No. 6,044,257, entitled PANIC BUTTON PHONE.

### Field of the Invention

In general, the present invention relates to cellular telephones for use only in emergency  
10 situations. In particular, the present invention relates to a cellular telephone for calling a public emergency response center or an emergency roadside assistance service.

### Background of the Invention

In the past, conventional, full-service cellular telephones have been used in emergency situations to call for help from public emergency response services by dialing 911. Placing such  
15 a call with a conventional cellular telephone requires performing the following steps: (1) pressing a POWER button to power-on the phone, (2) dialing the individual numbers 9-1-1 on a keypad, and (3) pressing a SEND or CALL button. Such conventional phones may also be used to call for emergency roadside assistance from a private assistance service, such as the American Automobile Association (AAA), when a user has experienced a mechanical failure while driving  
20 an automobile. Placing a call to the private assistance service with a conventional cellular phone requires that the above three steps be performed, except that typically a 1-800 number for the private assistance service is dialed on the keypad instead of 9-1-1.

Although this conventional procedure to place a cellular phone call seems to be straightforward, it becomes much more difficult when it must be accomplished during a stressful  
25 emergency situation, such as immediately after an automobile accident or breakdown. During such situations, simplicity is critical. It is desirable that the user need not have to remember any phone numbers to dial, or which of many keys to press to initiate a call.

It is also desirable to have a cellular telephone that is designed for limited-use, such as in emergency situations only, thereby significantly reducing the cost of cellular service.

Therefore, a cellular telephone is needed that may be used to call for help in emergency situations, is simple and straightforward to operate, and that may be operated at a minimal service charge.

### Summary of the Invention

5           The present invention meets the above-listed needs, and eliminates the oversights, difficulties, and disadvantages of the prior art by providing an emergency cellular telephone for establishing communication with multiple emergency response services. The phone allows a user to choose between calling a public emergency response service, also referred to as a Public Safety and Action Point (PSAP) or 911 call center, in immediate emergency situations, and  
10       calling a private assistance service in situations where urgent services are desired, such as roadside assistance. The call to the public emergency response service is placed by pressing a single public emergency response button, which is protected from inadvertent activation by a protective cover. The call to the private assistance service is placed by pressing a single private assistance call button. Both call buttons require firm pressure thereupon for several seconds  
15       before activation is initiated, thereby preventing accidental activation.

Preferred embodiments of the phone include an audible siren that is activated by simultaneously pressing a pair of buttons, one located on either side of the phone housing, for approximately one second. The siren, by generating a 95 dB alarm signal, helps the user to draw the attention of passersby to an emergency situation or to discourage an attacker.

20           The phone is preferably powered by four standard AAA alkaline batteries, which typically provide over a year of service with no recharging. Thus, the phone may be stored away, such as in a glove compartment of an automobile, for long periods of time and will be available when needed in an emergency situation. An alternate rechargeable battery pack module may also be attached to the phone. In some embodiments, this module also includes a Global Positioning  
25       System (GPS) receiver that is used to provide position coordinates indicating the location of the caller to the private assistance service or public emergency response service.

According to the invention, the phone comprises a handheld housing having a cellular transmitter, a cellular receiver, and a power supply disposed therein. The cellular transmitter transmits only first and second outgoing cellular signals, where the first outgoing cellular signal  
30       is for establishing a first communication session with a first emergency response service and the second outgoing cellular signal is for establishing a second communication session with a second

emergency response service. The cellular receiver receives only first and second incoming cellular signals, where the first incoming cellular signal is received from the first emergency response service during the first communication session, and the second incoming cellular signal is received from the second emergency response service during the second communication session.

Attached to the housing is a first activation button that, if pressed a first time when the telephone is in an off mode, causes the automatic initiation of several functions. Pressing the first activation button (1) causes electrical power from the power supply to be provided to the cellular transmitter and receiver, (2) initiates activation of the cellular receiver to search for an available cellular system channel, and (3) initiates activation of the cellular transmitter to transmit the first outgoing cellular signal to establish communication with the first emergency response service. Implementing a single activation button to initiate all of these functions simplifies communication with the first emergency response service in a stressful situation.

Also attached to the housing is a second activation button that, if pressed a first time when the telephone is in the off mode, causes (1) the electrical power from the power supply to be provided to the cellular transmitter and receiver, (2) initiates activation of the cellular receiver to search for an available cellular system channel, and (3) initiates activation of the cellular transmitter to transmit the second outgoing cellular signal to establish communication with the second emergency response service. Thus, communication with the second emergency response service is also simplified in a stressful situation.

The cellular transmitter is operable to transmit the first outgoing cellular signal to establish the first communication session regardless of whether the transmitter had last established a first communication session or a second communication session. Further, the cellular transmitter is operable to transmit the second outgoing cellular signal to establish the second communication session regardless of whether the transmitter had last established a first communication session or a second communication session. Thus, the operation of the phone is not limited to any particular sequence of placing calls to the public emergency response service and the private assistance service, thereby offering greater flexibility than has previously been available.

## Brief Description of the Drawings

Other objects, features and advantages of the present invention will become apparent by reference to the following detailed description when considered in conjunction with the accompanying drawings, in which like reference characters refer to like parts throughout the views, and wherein:

Fig. 1 depicts a top view of the emergency phone with a protective cover in an open position according to a preferred embodiment of the invention;

Fig. 2 depicts a top view of the emergency phone with the protective cover in a closed position according to a preferred embodiment of the invention;

Fig. 3 depicts a side view of the emergency phone with the protective cover in the open position according to a preferred embodiment of the invention;

Fig. 4 depicts a bottom view of the emergency phone according to a preferred embodiment of the invention;

Fig. 5 depicts a narrow side view of the emergency phone with the protective cover in the closed position according to a preferred embodiment of the invention;

Fig. 6 is a functional block diagram of the emergency phone according to a preferred embodiment of the invention;

Figs. 7A-C depict a functional flow diagram of a process for establishing an emergency cellular communication with an emergency response service according to a preferred embodiment of the invention;

Fig. 8 depicts a bottom view of the emergency phone with a battery compartment revealed according to a preferred embodiment of the invention; and

Fig. 9 depicts a top view of the emergency phone with the protective cover in an open position according to a preferred embodiment of the invention.

## Detailed Description

Referring generally to Figs. 1-5, a preferred embodiment of an emergency cellular telephone 10 for summoning help in an emergency is shown. The internal components of the phone 10 are contained within a rigid housing 12. The rigid housing 12 is preferably constructed of a durable material, such as polycarbonate, that will withstand being continuously carried in an individuals pocket or purse. Preferably, a protective cover 14 is movably attached at one edge to the rigid housing 12 by a pair of hinges 16. At the opposite edge of the cover 14 is a latch tab



18a that engages a latch pin 18b on the housing when the cover 14 is in the closed position. Preferably, the cover 14 may be opened by applying a gentle pulling force to the cover 14 to disengage the latch pin 18b from the latch tab 18a.

When the cover 14 is opened, as depicted in Figs. 1 and 3, two large activation buttons 20a and 20b, are revealed. The button 20a is referred to herein as a first activation button or a 911 button. This first activation button 20a is used to activate the phone 10 to establish communication with a public emergency response service. The button 20b is referred to herein as the second activation button or the AAA button. The second activation button 20b is used to activate the phone 10 to establish communication with a private roadside assistance service, such as the AAA. Depending on the given situation, a user simply opens the cover 14 and presses the button 20a or 20b to summon help in an emergency situation. As described in more detail below, when either button 20a or 20b is pressed, the phone 10 powers up and begins to establish cellular communication with the requested service.

In an alternative embodiment of the invention, the second activation button 20b is located on a side of the housing 12, such as in the position of the alarm button 36b. Thus, it should be appreciated that the invention is not limited to any particular position of the buttons 20a and 20b on the phone 10.

In the preferred embodiment, the 911 button 20a and the AAA button 20b are the only control buttons on the phone 10 that are disposed beneath the cover 14. Thus, when closed, the cover 14 prevents accidental pressing of the buttons 20a or 20b which could inadvertently place a call to the public emergency response service or the private assistance service. Preferably, other functions provided by the phone 10, as described hereinafter, may be activated when the cover 14 is closed.

As shown in Figs. 1 and 2, the preferred embodiment of the phone 10 includes three indicator lights 22, 24, and 26. The centermost of the three lights is a low signal indicator light 22, which is preferably a red LED. On the right is a high signal indicator light 24, which is preferably a green LED, and on the left is an in-use indicator light 26, which is preferably a yellow LED. The particular circumstances in which each of these lights is illuminated is described in more detail hereinafter.

As shown in Figs. 1-4, a low-profile radio-frequency antenna 30 is attached to the housing 12 for transmitting and receiving cellular signals.

A speaker port 32 and a microphone port 34 are also provided in the housing 12. Preferably, as shown in Figs. 1-4, the microphone port 34 is uncovered and accessible when the cover 14 is in the open position (Figs. 1 and 3) and in the closed position (Fig. 2). This feature allows the user to maintain a conversation with emergency response service personnel, even with the cover 14 closed. It may be advantageous in many circumstances to close the cover 14 after pressing the 911 button 20a or the AAA button 20b, thereby preventing accidental pressing of either button 20a or 20b while a call is in progress. As discussed in more detail hereinafter, pressing either of the buttons 20a or 20b while a call is in progress could terminate the call. Therefore, closing the cover 14 after initiating the call helps to avoid premature termination.

A preferred embodiment of the phone 10 includes an audible alarm or siren that alerts individuals in the immediate area that an emergency exists. Preferably, the audible alarm is activated by simultaneously pressing two alarm buttons 36a and 36b located on either side of the housing 12. When the buttons 36a and 36b are pressed, an alarm type noise is emitted from an alarm port 28 in the housing 12. The number of different sounds that could be produced is limitless but the sound produced is preferably similar to that produced by a car alarm. In the preferred embodiment, the audible alarm is deactivated by simultaneously pressing the alarm buttons 36a and 36b again.

In order to minimize the cost of the cellular service needed to support it, the emergency phone 10 is strictly limited to emergency use only. Governmental regulations currently prohibit cellular service providers from refusing calls to 911 emergency response centers, even if the caller does not subscribe to a cellular service. Thus, the user may place 911 emergency calls using the phone 10 without having previously contracted for cellular service. As discussed in more detail below, the cost of cellular service for placing calls only to a single telephone number of a private assistance service, such as AAA, may be purchased at a rate far less than is typically paid for conventional cellular service. Further, this cost may be included in a membership fee that the user pays to the private organization that provides the roadside assistance, such as AAA.

Another one of the primary benefits of limiting use of the phone 10 to contacting only a public or a private emergency response service using one of two activation buttons 20a and 20b is the resulting simplicity of operation. As shown in Fig. 1, the activation buttons 20a and 20b are relatively large in relation to the size of the housing 12. Thus, the buttons 20a and 20b are easy to locate during a stressful emergency situation. Since only one button 20a or 20b need be pressed to initiate a call, even very young children or persons with an aversion to most electronic

devices can be taught how to use the phone 10 to easily summon help in an emergency. Further, the time required to summon the emergency personnel is held to an absolute minimum. Almost as soon as the activation button 20a or 20b is pressed, the user has a verbal communications link to the public or private assistance service.

Fig. 5 depicts a preferred embodiment of the emergency phone 10 as viewed from the direction indicated by the arrows A-A in Fig. 2. As shown in Fig. 5, the phone 10 includes an interface port 38 which is accessible from outside the housing 12. As described in more detail below, the interface port 38 provides a programming and data transfer interface to allow modifications to the programming of the phone 10.

In addition to establishing cellular contact with an emergency response service, the emergency phone 10 may be configured to activate the home security system of the user. Because the radio communications range of the emergency phone 10 is limited, the emergency phone 10 can only contact the user's home security system when the emergency phone 10 is close to the home security system. Preferably, the radio communications range of the emergency phone 10 extends to at least 500 feet from the home security system. The home security system can react to the emergency phone's signal in a number of ways. In the preferred embodiment, the home security system turns the lights of the residence on and off and activates any audible alarms that the home security system uses. Turning on and off the house's lights and sounding the home security system's audible alarms can be beneficial for a number of reasons. First, the home security system alarm will only be activated if the emergency phone 10 is used when it is near the home. Thus, if the emergency situation involves an intruder or attacker, turning on the lights and sounding the alarms may scare the individual away. Secondly, turning on the lights and sounding the alarms will alert any individuals in or around the house that an emergency situation exists in or near the house. In addition, any of the variety of other functions typically performed by a home security system can be triggered by the signal from the emergency phone 10.

An embodiment of the emergency phone 10 is also provided that contacts the car alarm of the user. In a manner similar to that described for contacting the home security system of the user, the emergency phone 10 transmits a signal that activates the car alarm. The emergency phone 10 will only be able to signal the car alarm if the user is near the car when the emergency phone 10 is activated. Thus, the car alarm will help draw attention to the area in which the emergency situation exists. This could be especially beneficial if the emergency situation arose

in a parking lot. Furthermore, if the car was just stolen, setting off the car alarm will draw attention to the thief and the stolen car.

One embodiment of the phone 10 includes a visual alarm button 40 that activates a flashing light 42 mounted on the housing 12. The flashing light 42 and the noise alarm serve similar functions. On the one hand they serve to scare off attackers, on the other hand they serve to draw attention to the individual requesting emergency assistance. Because the emergency phone 10 can be activated from anywhere that cellular service is available, the exact location of the caller may be unknown to the emergency response personnel. Thus, by drawing attention to the emergency phone 10 and its operator, the flashing light 42 and the audible alarm may be very helpful to emergency response personnel attempting to locate the individual who summoned them.

As mentioned above, a preferred embodiment of the invention includes a locator function. The locator function provides the public or private emergency response service the location of the emergency phone 10 at the time it was activated. The locator function is implemented in a variety of manners in different embodiments of the present invention. One embodiment involves the use of a GPS receiver. A GPS receiver utilizes signals from satellites orbiting the earth to determine the position of the receiver. When the first or second activation button 20a or 20b is pressed, the GPS receiver is activated to determine the location of the phone 10. The phone 10 then automatically transmits this positional information to the emergency response service. Another embodiment of the present invention uses a cellular location system to determine the position of the emergency phone 10, such as by triangulation. This cellular location system uses the strength and/or the relative phase of a signal from the phone 10 received at different cellular stations to determine the location of the phone 10. Positional information is extremely beneficial in an emergency situation because it allows the emergency response service to determine the location of the caller without requiring any input from the caller.

Referring now to Fig. 6, a block diagram of the electrical components of a preferred embodiment of the emergency phone 10 is shown. Power for the electrical components of the emergency phone 10 is supplied by a power supply 44. In the preferred embodiment, the power supply 44 is a DC power supply consisting of four replaceable AAA alkaline batteries. Alkaline batteries are preferred because they will allow a minimum continuous talk time of at least 30 minutes, are relatively inexpensive, are easily replaceable, and have a relatively long shelf-life between uses. Although lithium and nickel-cadmium batteries are typically the batteries of

choice for conventional cellular phones, such batteries require constant recharging to maintain a useable voltage level. Such batteries are not preferred for use as the power supply 44 for the emergency phone 10 because they cannot maintain a charge during long periods of nonuse. Since the emergency phone 10 may be stored away, such as in an automobile glove compartment, for long periods between uses, long-life alkaline batteries are used in the preferred embodiment of the invention.

As described in more detail below, the GPS location function of the phone 10 may be provided by an add-on GPS receiver module. In that embodiment, the GPS module preferably includes a lithium or nickel-cadmium battery pack to provide adequate power for the phone components within the housing 12 and for the components of the GPS module.

As described above, the preferred embodiment of the invention has five user input buttons 36a, 36b, 20a, 20b, and 54. While these user inputs 36a, 36b, 20a, 20b, and 54 are shown and discussed as push-buttons, it is understood that the inputs 36a, 36b, 20a, 20b, and 54 may operate switches, touch sensors, or other similar devices.

With reference to Fig. 6, a microprocessor 46 monitors the state of a pair of alarm switches 27a and 27b which change state when the user presses the alarm buttons 36a and 36b. When the microprocessor 46 detects that the alarm switches 27a-b have changed state at the same time, the microprocessor 46 activates the audible alarm 48. As mentioned above, when activated, the audible alarm 48 generates a siren-like audio alarm signal. Preferably, the audible alarm 48 is driven by an audio driver circuit 50.

As described above, some embodiments include a flashing light 42. Preferably, the flashing light 42 is activated by a light driver circuit 52 in response to the audible alarm buttons 36a and 36b or the activation button 20a being pressed. The flashing light 42 helps to alert individuals in the immediate area that an emergency situation exists. In addition, once emergency response personnel have been summoned, the flashing light 42 can help the emergency personnel locate the emergency phone 10 and, thus, the individual who summoned the assistance.

A home security alarm button 54 is also provided. When the home alarm button 54 is pressed, a home alarm signal is sent to the microprocessor 46. In response to the home alarm signal, the microprocessor 46 produces an activation signal which is sent to a radio frequency transmitter 56. The radio frequency transmitter 56 conditions the activation signal and broadcasts it on the antenna 30. The preferred radio frequency transmitter 56 operates at about 310 MHz.

The home security system detects the transmitted activation signal and responds accordingly. As discussed in greater detail above, the response preferably at least includes turning on and off the exterior lights of the house and producing an audible alarm.

In one embodiment, when either of the activation buttons 20a and 20b are pressed, the microprocessor 46 activates an automatic dialer 58, and the automatic dialer 58 dials the telephone number of the selected emergency response service. The telephone numbers may be stored in the automatic dialer 58 itself. In an alternate embodiment, the memory 60 is provided for storing the telephone numbers.

A cellular receiver 62 receives an incoming cellular signal from the public or private emergency response service and conditions the incoming signal to produce an incoming voice signal. The cellular receiver 62 may provide the voice signal to a speaker 64 directly or through the microprocessor 46 and the audio driver circuit 50, as shown in Fig. 6.

The operator of the emergency phone 10 can respond to the incoming signal from the emergency response services by speaking into the microphone 66. The microphone 66 converts the operator's speech into an outgoing voice signal that is conditioned by the audio driver circuit 50 and received by the microprocessor 46. The microprocessor 46 then sends the outgoing voice signal to a cellular transmitter 68, which generates an outgoing cellular signal based thereon. In an alternate embodiment, the outgoing voice signal is sent directly from the microphone 66 to the cellular transmitter 68.

The emergency phone 10 is designed to use the cellular communications technology that provides the most comprehensive coverage possible. Using the cellular technology that provides the largest possible coverage area is desirable because it minimizes the likelihood that the operator of the emergency phone 10 will be out of cellular communications range when an emergency situations arises. While the coverage range of digital cellular service providers is constantly increasing, the largest amount of cellular coverage is still provided by service providers using analog modulation technology. Thus, in the preferred embodiment, the cellular receiver 62 and cellular transmitter 68 use analog modulation technology. Furthermore, because the amount of time actually spent communicating with the emergency phone 10 will likely be very low, the cellular receiver 62 and transmitter 68 components are designed for maximum range and minimal talk times.

In another alternative embodiment, the emergency phone 10 is designed to scan for a digital cellular provider. If a digital cellular service provider is located, the emergency phone 10

will establish digital communications with the digital service provider. If no digital service provider is located, the emergency phone 10 then attempts to establish analog cellular communications with an analog service provider.

In the embodiment of Fig. 6, when the first or second activation button 20a or 20b is pressed, the microprocessor 46 prompts a GPS receiver 70 coupled to a GPS antenna 71 to determine the location of the emergency phone 10. Once the GPS receiver 70 has determined the coordinates of the emergency phone 10, the GPS receiver 70 provides the coordinates to the microprocessor 46. The microprocessor 46 then sends the location coordinates and the cellular system identification (SID) number of the phone 10 to the cellular transmitter 68, such as in the form of a digital string. The cellular transmitter 68 sends the location coordinates and the SID to the emergency response service by way of a cellular telephone network. The location coordinates allow the emergency response service to dispatch emergency personnel to the location from which the call was placed without even questioning the caller. Transmission of the SID allows the private assistance service or the public response service to determine the identity of the owner of the phone 10.

As shown in Fig. 6, the preferred embodiment of the invention includes a decoder chip 79 for decoding a prompt or queue signal transmitted from the private assistance service or the public emergency response service when a call has been established. The decoded prompt is provided to the microprocessor 46 which, in response to the prompt, sends the location coordinates and the SID to the cellular transmitter 68 for transmission to the connected service. In this way, the private assistance service or the public emergency response service has this information available even before voice communication is established with the caller.

The microprocessor 46 is also coupled to the light driver circuit 52 for controlling activation of the low signal indicator light 22, the high signal indicator light 24, and the in-use indicator light 26. The particular circumstances in which the microprocessor 46 causes activation of each of these lights is described in more detail hereinafter.

Figs. 7A and 7B depict a flow diagram of a sequence of events that are set in motion when either the first or second activation button 20a or 20b is pressed to place an emergency call. The sequence of events is generally the same for when the phone 10 is activated by either button 20a or 20b. However, there are some differences, as described in the following discussion.

To gain access to the activation buttons 20a and 20b, the user first opens the protective cover 14 (step 100). With the cover 14 in the open position (as shown in Figs. 1 and 3), the user

presses the activation button 20a to place a call to a public emergency response service, or presses the activation button 20b to place a call to a private assistance service, such as the AAA. When pressing either button 20a or 20b, the user maintains pressure on the button 20a or 20b for at least a minimum period of time, such as one second (step 102). The user may then close the cover 14 (step 104) to prevent accidentally terminating the call, which could occur if the button 20a or 2b is inadvertently pressed again. Of course, the emergency phone 10 is also operable to complete the call if the cover 14 remains in the open position.

It is assumed for purposes of this description that the phone 10 is in a power-down mode prior to step 102. In other words, the cellular transmitter 68, the cellular receiver 62, and the microprocessor 46 are preferably drawing no power from the power supply 44. When the button 20a or 20b is pressed a first time and held for at least the minimum period of time, the phone 10 is powered up (step 106). Preferably, the microprocessor 46 powers-up and begins executing preprogrammed instructions before power is provided to the receiver 62 and transmitter 68. Alternatively, the microprocessor 46, the receiver 62, and the transmitter 68 receive power simultaneously when the button 20a or 20b is pressed and held. In either case, when the microprocessor 46 is powered on, it proceeds to retrieve system operating parameters from the memory device 60 (step 108). These operating parameters preferably include an A/B preference parameter that indicates which cellular system, A or B, is preferred.

As one skilled in the art will appreciate, the A and B cellular systems each include twenty-one cellular channels, with the A system channels occupying one frequency range and the B system channels occupying another frequency range. As required by FCC rules, both of these systems are typically available in large metropolitan areas to provide competition between cellular service providers. In some geographical areas, only one of the systems may be available.

If a conventional cellular phone is receiving cellular service from a service provider operating on the A system, that phone will prefer the A system over the B system, and will scan first for an available A system channel. If an A system channel is not available, the conventional phone will then scan for a B system channel. If a B system channel is available, the conventional phone will use the available B system channel in what is typically referred to as a "roaming" mode. When roaming, the A system-preferred user typically pays a higher cost per call to use a B system channel.

Since use of the emergency phone 10 to make a 911 call does not require a cellular service agreement with any cellular service provider, the phone 10 need not prefer either cellular



system over the other when placing a 911 call. Thus, when the phone 10 is activated by pressing the first activation button 20a, the phone 10 may seek an available channel in either the A system or the B system.

Although current U.S. federal law requires that cellular service providers pass all 911 calls, some cellular providers still do not do so. If the cellular provider does not pass the 911 call, the caller typically receives a busy signal or a recorded message indicating that the call cannot be completed. To remedy this situation, in one embodiment, the phone 10 alternates which cellular system (A or B) on which it begins to dial for every other call. For example, if the first call is made on the A system and the caller receives a busy signal or recorded message, the caller may disconnect the call, press the 911 button 20 again, and the phone 10 makes the call on the B system.

With reference to Fig. 7A, after the microprocessor 46 has retrieved the system parameters from memory 60 (step 108), the receiver 62 of a preferred embodiment proceeds to scan first through B system channels (step 110) looking for a signal of sufficient strength to support a cellular call (step 112). The B system preference is determined by the A/B preference parameter recalled from memory at step 108. If no signal is found in the B system channels having a signal strength greater than a minimum threshold value, the receiver 62 then scans through the cellular A system channels (step 114). If no signal is found in the A system channels having a signal strength greater than the minimum threshold value, the low signal indicator light 22 is illuminated (step 116), and the receiver 62 starts scanning the B system channels again (step 110). This process continues until a signal of sufficient strength is found in the A or B system channels.

When an available channel having sufficient signal strength is found in either the B system channels (step 112) or the A system channels (step 118), the high signal indicator light 24 is illuminated (step 120). If more than one channel having a signal strength greater than the minimum threshold is found, the channel having the highest signal strength is selected for the call (step 122).

It should be appreciated that, depending on the preference parameter stored in the memory 60, the phone 10 could search for an available channel on the A system first, and then search in the B system if a signal of sufficient strength is not found in the A system. Thus, the A/B preference can be set at the time that the phone is manufactured by the selection of the value

of the preference parameter stored in memory 60. As described in more detail below, this parameter may also be reprogrammed after the manufacture of the phone 10.

As shown in Fig. 7B, after channel selection, the microprocessor 46 retrieves from the memory device 60 the telephone number of the selected emergency response service (step 124).

5 If the call was initiated by pressing the first activation button 20a, then the telephone number of the public emergency response service is retrieved at step 124. Preferably, the telephone number of the public emergency response service is "911", which is associated with all public emergency response centers in the United States. The telephone number stored in the memory 60 for the private emergency response service, such as the AAA, is preferably an eleven-digit 1-800 number  
10 that may be used throughout the United States.

When the telephone number of the public or private emergency response service has been retrieved from memory 60, the cellular transmitter 68 transmits an outgoing cellular signal on the selected cellular channel (step 126) and the in-use indicator light 26 begins flashing (step 128).

Note that all of the events that have occurred thus far in the calling process (steps 106-128) have been initiated by pressing a single one of the activation buttons 20a or 20b. Thus, once  
15 powered-on, the microprocessor 46 executes its preprogrammed instructions to automatically scan for an available channel, retrieve the telephone number, and place the cellular call without any further action on the part of the user.

At this point, the selected emergency response service answers the call from the emergency phone 10 by transmitting a cellular signal referred to herein as an incoming cellular  
20 signal. As shown in Fig. 7B, the receiver 62 receives the incoming cellular signal (step 130), and the in-use indicator light 26 remains constantly on (step 132) to indicate to the user that communication with the emergency response service has been established.

In the preferred embodiment of the invention, once communication has been established,  
25 the emergency response service transmits and the decoder 79 receives the prompt signal (step 134). The microprocessor 46 then retrieves the SID from memory 60 (step 136) and retrieves the location coordinates from the internal GPS receiver 70 or an external GPS unit 74 (step 138). The transmitter 56 then transmits an outgoing cellular signal that includes the SID and location coordinates, such as in a digital data string (step 140). Preferably, the microphone 66 and the  
30 speaker 64 are then enabled (step 142).

Based on the incoming cellular signal from the emergency response service, the receiver 62 produces an incoming voice signal (step 144), which is preferably an electrical audio signal.

As shown in Fig. 7C, the incoming voice signal is provided to the speaker 64 to produce audible sound (step 146). Typically, the audible sound produced by the speaker at this juncture will be the voice of a person at the emergency response service inquiring as to the nature of the emergency.

5 With continued reference to Fig. 7C, the user of the emergency phone 10 speaks into the microphone port 34 to relay the nature of the emergency to the emergency response personnel (step 148). The microphone 66 receives the audible sound of the user's voice and produces an outgoing voice signal based thereon (step 150). The outgoing voice signal is provided to the cellular transmitter 68 (step 152), and the transmitter 68 transmits an outgoing cellular signal to  
10 the emergency response service based on the outgoing voice signal (step 154).

When the user wishes to terminate the call to the emergency response service, the user presses the button 20a or 20b (whichever one had been pressed to initiate the call) for a second time, and holds the button 20a or 20b for a minimum period of time, such as one second (step 156). When the microprocessor 46 determines that the button 20a or 20b is pressed and held  
15 while the phone 10 is powered up, the microprocessor 46 causes the phone 10 to power down. Requiring that the button 20a or 20b be held down for a minimum time prevents accidental termination of the emergency call due to an inadvertent pressing of one of the buttons 20a or 20b.

Thus, as indicated by the flow chart of Figs. 7A-C, all of the steps involved in making an emergency telephone call to an emergency response service are accomplished by a single press of  
20 one activation button 20a or 20b on the emergency phone 10. This makes it much simpler for a person who is distracted by a stressful situation, or who may be in some way incapacitated, to place an emergency call.

By comparison, using a conventional cellular phone to place a call to a 911 emergency response service requires that a user press at least four separate control buttons: the power button  
25 once, the "9" button once, the "1" button twice, and the "SEND" button (or equivalent) once. Calling a 1-800 number to a private service such as the AAA further requires pressing the additional digits in the phone number. To end a call and power-down a conventional cellular phone, the user must typically press the "END" button (or equivalent) once, and then the power button once. Thus, establishing and ending a 911 emergency call using a conventional cellular  
30 phone requires at least seven presses of five different buttons. Only two presses of a single activation button 20a are required with the emergency phone 10 of the present invention.

With reference to Fig. 6, the interface port 38, such as an RS232 interface, allows the processor 46 of the emergency phone 10 to communicate with an external device. In one embodiment of the invention, the external device is a geographical locating device, such as an external GPS unit 74. In this embodiment, the GPS unit 74 provides positional coordinate data to the phone 10 by way of the interface port 38. This positional data may then be transmitted to the public or private emergency response service to give the emergency response personnel an exact position of the phone 10. Preferably, the GPS unit 74 is in a relatively small modular housing which may be removably connected to the phone housing 12, such as by a latching mechanism. The modular housing of the GPS unit 74 includes an interface connector that mates with the interface port 38 when the housing of the GPS unit 74 is connected to the phone housing 12. Alternatively, the GPS unit 74 may communicate with the interface port 38 by way of an interface cable.

As shown in Fig. 6, the GPS unit 74 preferably includes a modular mapping card 76. The mapping card 76 is a memory device which correlates latitude/longitude coordinates, as typically provided by a GPS system, to X-Y (rectangular) coordinates in feet or miles. Preferably, the X-Y coordinates provided by the mapping card 76 are relative to some local landmark. In this manner, the positional data that the phone 10 transmits to the emergency response service may be more easily used by emergency response personnel in mapping the exact position of the emergency phone 10.

As depicted in Fig. 8, in one embodiment of the invention, the standard batteries 44a-44d may be replaced by a GPS/battery pack module 86. In this embodiment, GPS/battery pack module 86 includes the GPS unit 74 integrated with a custom lithium, nickel-cadmium, or alkaline battery pack that powers the phone 10 and the GPS unit 74. When snapped into place on the phone housing 12, power contacts on the GPS/battery pack module 86 engage corresponding battery contacts 88 in the battery compartment 82, and an interface connector 90 on the module 86 make connection with the interface port 38 on the phone housing 12.

The interface port 38 is also useful in providing access to the microprocessor 46 and memory 60 for programming purposes. For example, the interface port 38 may be used to change or update the outgoing emergency telephone numbers stored in the memory 60. This function is especially important since there is no keypad such as is typically used on conventional cellular phones for reprogramming purposes. As shown in Fig. 8, a phone number programming unit 78, such as a palm-top or lap-top computer, may be connected to the interface port 38 to

provide commands to the processor 46 to store the outgoing telephone numbers to the memory 60.

One skilled in the art will appreciate the interface port 38 may also be used to update the software instructions that are executed by the processor 46 when either of the activation buttons 20a or 20b are pressed. For example, the sequence of A/B cellular system scanning as described above could be updated to take advantage of future changes in cellular service provider procedures or future FCC rulings that may affect how 911 calls are handled by service providers.

Also, system parameters that are stored in the memory 60 may be updated by way of the interface port 38. For example, the A/B system preference parameter may be changed to prefer the A system channels over the B system channels, such that the A system channels are scanned first. This latter change may be required when the contracted cellular service used to contact the private emergency response service is switched from one cellular service provider to another.

As shown in Fig. 4, the preferred embodiment of the invention includes a battery compartment cover 80 which snaps securely into place on the housing 12. Removal of the battery compartment cover 80 reveals the battery compartment 82 as shown in Fig. 8. Within the battery compartment 82 are preferably four batteries 44a, 44b, 44c, and 44d, such as AAA alkaline batteries, which comprise the power supply 44 (see Fig. 6). In addition to the advantages discussed previously, these types of batteries are preferred to power the emergency phone 10 because they are so easy to find for purchase at most department stores, hardware stores, grocery stores, and convenience stores. In contrast, consider that conventional cellular phones require custom-sized battery packs that are typically compatible only with one model of phone. Replacement battery packs for conventional cellular phones typically may only be found at specialty stores, such as phone accessory stores or electronic supply stores. Thus, because of the relative ease in finding replacement batteries, the emergency phone 10 offers yet another significant advantage over conventional cellular phones.

The design of the battery compartment 82 and the battery compartment cover 80 of the emergency phone 10 also makes the emergency phone 10 more rugged than the conventional cellular phone. In most conventional cellular phones, the battery packs constitute a significant portion of the phone housing. Usually, the conventional cellular phone battery pack is integrated into a single modular unit which may be snapped into place to form a portion of the phone housing. If the conventional phone is dropped or hit, the conventional battery pack is susceptible

to being dislodged from the phone housing. If this were to occur during an emergency call, communication with the emergency response center would be lost.

In contrast, the preferred embodiment of the emergency phone 10 is significantly less susceptible to battery failure, even if the phone 10 is dropped or jarred. First, the battery compartment cover 80 provides protection for the batteries 44a-44d held within the compartment 82. Further, since the batteries 44a-44d are separate from the cover 80, an impact which may dislodge the cover 80 would not necessarily dislodge the batteries 44a-44d. Thus, the emergency phone 10 could remain operational even if the battery compartment cover 80 comes off.

Fig. 9 illustrates yet another advantageous feature of the emergency phone 10. When the protective cover 14 is in the open position, operation instructions 84 are visible to the user on the inside surface of the cover 14. Preferably, these operation instructions 84 include written and illustrated instructions on how to use the phone 10 to place a call to the public or private emergency response service, and how to activate the audible alarm 48. These instructions 84 may be screen printed directly onto the inside surface of the plastic cover 14, or are preferably printed on a stick-on label which is applied to the inside surface of the cover 14.

Of course, since only one button 20a or 20b is used to activate the phone and place a call, the instructions 84 are simple and straightforward. However, the first time that a user actually needs to use the phone 10 may be in the midst of a stressful, confusing, or dangerous situation. In such a situation, having the operating instructions 84 provided inside the cover 14 could save valuable time. Also, since the emergency phone 10 is intended for emergency use only, considerable time may pass between uses. Because the phone 10 may not be used very often, even though the user may have used the phone 10 before, the user may forget how it operates when the user is in a stressful situation. Thus, the operation instructions 84 provide a handy and quick reminder.

While the invention has been described in detail, it is to be expressly understood that it will be apparent to persons skilled in the relevant art that the invention may be modified without departing from the spirit of the invention. Various changes of form, design or arrangement may be made to the invention without departing from the spirit and scope of the invention. Therefore, the above mentioned description is to be considered exemplary, rather than limiting, and the true scope of the invention is that defined in the following claims.

## CLAIMS

What is claimed is:

1. An emergency cellular telephone for establishing communication with multiple emergency response services, comprising:
  - a handheld housing;
  - a cellular transmitter disposed within the housing for transmitting only first and second outgoing cellular signals, the first outgoing cellular signal for establishing a first communication session with a first emergency response service and the second outgoing cellular signal for establishing a second communication session with a second emergency response service;
  - a cellular receiver disposed within the housing for receiving only first and second incoming cellular signals, the first incoming cellular signal received from the first emergency response service during the first communication session, and the second incoming cellular signal received from the second emergency response service during the second communication session;
  - a power supply disposed within the housing for supplying electrical power for the telephone;
  - a first activation button attached to the housing that, if pressed a first time when the telephone is in an off mode, causes the electrical power from the power supply to be provided to the cellular transmitter and receiver, initiates activation of the cellular receiver to search for an available cellular system channel, and initiates activation of the cellular transmitter to transmit the first outgoing cellular signal to establish communication with the first emergency response service, thereby simplifying communication with the first emergency response service in a stressful situation;
  - a second activation button attached to the housing that, if pressed a first time when the telephone is in the off mode, causes the electrical power from the power supply to be provided to the cellular transmitter and receiver, initiates activation of the cellular receiver to search for an available cellular system channel, and initiates activation of the cellular transmitter to transmit the second outgoing cellular signal to establish communication with the second emergency response service, thereby

30 simplifying communication with the second emergency response service in a  
stressful situation; and  
the cellular transmitter operable to transmit the first outgoing cellular signal to establish  
the first communication session regardless of whether the transmitter had last  
established a first communication session or a second communication session, and  
35 operable to transmit the second outgoing cellular signal to establish the second  
communication session regardless of whether the transmitter had last established a  
first communication session or a second communication session.

2. The emergency cellular telephone of claim 1 further comprising:  
a microprocessor for controlling the emergency cellular telephone based on execution of a  
first or second set of operational instructions;  
the first activation button, when pressed a first time, causing the electrical power from the  
power supply to be provided to the microprocessor, thereby energizing the  
microprocessor to begin executing the first set of operational instructions; and  
the second activation button, when pressed a first time, causing the electrical power from  
the power supply to be provided to the microprocessor, thereby energizing the  
microprocessor to begin executing the second set of operational instructions.
3. The emergency cellular telephone of claim 2 further comprising:  
a modular Global Positioning System (GPS) receiver unit operable to mechanically  
engage the handheld housing as a snap-on module, the GPS receiver unit  
including a GPS receiver for generating location coordinates of the telephone; and  
the microprocessor for receiving the location coordinates from the GPS receiver and  
providing the location coordinates to the cellular transmitter; and  
the cellular transmitter for transmitting the location coordinates to the first or second  
emergency response services.
4. The emergency cellular telephone of claim 3 further comprising:  
a battery compartment disposed within the housing;  
an interface port disposed on the housing and providing electrical connection to the  
microprocessor; and  
the modular GPS receiver unit further comprising:



a battery pack integrated with the GPS receiver, the battery pack operable to be inserted into the battery compartment of the telephone housing when the GPS receiver unit is mechanically engaged with the telephone housing, the battery pack thereby serving as the power supply for the telephone; and  
an interface connector mechanically operable to engage the interface port when the GPS receiver unit is mechanically engaged with the telephone housing, for providing electrical connection between the GPS receiver and the microprocessor.

5. The emergency cellular telephone of claim 3 further comprising:  
a decoder for receiving a prompt signal from the first or second emergency response service after cellular communication has been established therewith, and for providing the prompt signal to the microprocessor; and  
the microprocessor for providing the location coordinates to the cellular transmitter upon receipt of the prompt signal from the decoder.
6. The emergency cellular telephone of claim 5 further comprising:  
a memory device for storing an identification number associated with the telephone;  
the microprocessor further for retrieving the identification number from the memory device and for providing the identification number to the cellular transmitter upon receipt of the prompt signal from the decoder; and  
the cellular transmitter for transmitting the identification number to the first or second emergency response services.
7. The emergency cellular telephone of claim 1 further comprising:  
a memory device for storing an identification number associated with the telephone;  
the microprocessor further for retrieving the identification number from the memory device and for providing the identification number to the cellular transmitter; and  
the cellular transmitter for transmitting the identification number to the first or second emergency response services.

8. The emergency cellular telephone of claim 7 further comprising:  
a decoder for receiving a prompt signal from the first or second emergency response  
service after cellular communication has been established therewith, and for  
providing the prompt signal to the microprocessor; and

5 the microprocessor for providing the identification number to the cellular transmitter upon  
receipt of the prompt signal from the decoder.

9. The emergency cellular telephone of claim 2 further comprising:  
the microprocessor for controlling the cellular receiver based on execution of the first or  
second set of operational instructions;  
the cellular receiver for scanning for a strongest cellular signal from among available  
5 cellular system channels based on the first set of operational instructions executed  
by the microprocessor when the first activation button is pressed; and  
the cellular receiver for scanning for a strongest cellular signal from among available  
cellular system channels based on the second set of operational instructions  
executed by the microprocessor when the second activation button is pressed.

10. The emergency cellular telephone of claim 9 further comprising the microprocessor and  
receiver for determining a strongest B cellular signal from among cellular signals found in  
B cellular system channels when the first or second activation button is pressed the first  
time, for determining whether the strongest B cellular signal has a signal strength greater  
5 than a minimum threshold, and for determining a strongest A cellular signal from among  
cellular signals found in A cellular system channels when the strongest B cellular signal  
has a signal strength less than the minimum threshold.

11. The emergency cellular telephone of claim 9 further comprising the microprocessor and  
receiver for determining a strongest A cellular signal from among cellular signals found  
in A cellular system channels when the first or second activation button is pressed the first  
time, for determining whether the strongest A cellular signal has a signal strength greater  
5 than a minimum threshold, and for determining a strongest B cellular signal from among  
cellular signals found in B cellular system channels when the strongest A cellular signal  
has a signal strength less than the minimum threshold.

12. The emergency cellular telephone of claim 1 further comprising:  
the first activation button for causing the emergency cellular telephone to terminate  
communication with the first emergency response service when the first activation  
button is pressed a second time that is subsequent to the first time; and  
5 the second activation button for causing the emergency cellular telephone to terminate  
communication with the second emergency response service when the second  
activation button is pressed a second time that is subsequent to the first time.

13. The emergency cellular telephone of claim 9 further comprising:  
a memory device for storing a first emergency telephone number associated with the first  
emergency response service, and for storing a second emergency telephone  
number associated with the second emergency response service;  
5 the microprocessor for accessing the first emergency telephone number from the memory  
device and for activating the cellular transmitter when the first activation button is  
pressed the first time and a signal strength of the strongest signal is greater than a  
minimum threshold;  
the microprocessor for accessing the second emergency telephone number from the  
10 memory device and for activating the cellular transmitter when the second  
activation button is pressed the first time and a signal strength of the strongest  
signal is greater than a minimum threshold;  
the cellular transmitter for transmitting the first outgoing cellular signal when activated by  
the microprocessor to attempt to establish cellular communication with the first  
15 emergency response service associated with the first emergency telephone  
number; and  
the cellular transmitter for transmitting the second outgoing cellular signal when activated  
by the microprocessor to attempt to establish cellular communication with the  
second emergency response service associated with the second emergency  
20 telephone number.

14. The emergency cellular telephone of claim 13 further comprising the memory device for  
storing the first emergency telephone number associated with a public emergency

response service, and for storing the second emergency telephone number associated with a private customer assistance service.

15. An emergency cellular telephone for establishing communication with multiple emergency response services, comprising:

a handheld housing;

a cellular transmitter disposed within the housing for transmitting only first and second

outgoing cellular signals, the first outgoing cellular signal for establishing a first communication session with a public emergency response service and the second outgoing cellular signal for establishing a second communication session with a private emergency response service;

a cellular receiver disposed within the housing for receiving only first and second incoming cellular signals, the first incoming cellular signal received from the public emergency response service during the first communication session, and the second incoming cellular signal received from the private emergency response service during the second communication session;

a memory device disposed within the housing for storing a first emergency telephone number associated with the public emergency response service, and a second emergency telephone number associated with the private emergency response service;

a microprocessor disposed within the housing for controlling the cellular receiver based on execution of a first or second set of operational instructions;

a power supply disposed within the housing for supplying electrical power for the telephone;

a first activation button attached to the housing that, if pressed a first time when the telephone is in an off mode, causes the electrical power from the power supply to be provided to the cellular transmitter, the cellular receiver, and the microprocessor, initiates the microprocessor to begin executing the first set of operational instructions, initiates activation of the cellular receiver to search for an available cellular system channel, and initiates activation of the cellular transmitter to transmit the first outgoing cellular signal to establish communication with the public emergency response service, thereby simplifying

30 communication with the public emergency response service in a stressful situation;

a second activation button attached to the housing that, if pressed a first time when the telephone is in the off mode, causes the electrical power from the power supply to be provided to the cellular transmitter, the cellular receiver, and the

35 microprocessor, initiates the microprocessor to begin executing the second set of operational instructions, initiates activation of the cellular receiver to search for an available cellular system channel, and initiates activation of the cellular transmitter to transmit the second outgoing cellular signal to establish communication with the private emergency response service, thereby simplifying

40 communication with the private emergency response service in a stressful situation;

the cellular receiver further for scanning for a strongest cellular signal from among available cellular system channels based on the first set of operational instructions executed by the microprocessor when the first activation button is pressed, and for

45 scanning for a strongest cellular signal from among available cellular system channels based on the second set of operational instructions executed by the microprocessor when the second activation button is pressed;

the microprocessor further for accessing the first emergency telephone number from the memory device and for activating the cellular transmitter when the first activation button is pressed the first time and a signal strength of the strongest signal is

50 greater than a minimum threshold;

the microprocessor further for accessing the second emergency telephone number from the memory device and for activating the cellular transmitter when the second activation button is pressed the first time and the signal strength of the strongest

55 signal is greater than the minimum threshold;

the cellular transmitter further for transmitting the first outgoing cellular signal when activated by the microprocessor to attempt to establish the first communication session with the public emergency response service associated with the first emergency telephone number, and for transmitting the second outgoing cellular

60 signal when activated by the microprocessor to attempt to establish the second

communication with the private emergency response service associated with the second emergency telephone number;

the cellular transmitter further operable to transmit the first outgoing cellular signal to establish the first communication session regardless of whether the telephone had last established a first communication session or a second communication session, and operable to transmit the second outgoing cellular signal to establish the second communication session regardless of whether the telephone had last established a first communication session or a second communication session;

the first activation button further for causing the emergency cellular telephone to terminate communication with the public emergency response service when the first activation button is pressed a second time that is subsequent to the first time; and

the second activation button further for causing the emergency cellular telephone to terminate communication with the private emergency response service when the second activation button is pressed a second time that is subsequent to the first time

16. An emergency cellular telephone for establishing communication with multiple emergency response services, comprising:

a memory device operable to store only a first telephone number and a second telephone number, and no other telephone numbers;

a first and a second activation button, and no other activation buttons;

a cellular transmitter coupled to the first and second activation buttons, the transmitter only operable when activated by pressure upon the first or second activation button, and for transmitting outgoing cellular signals when activated;

a cellular receiver coupled to the first and second activation buttons, the receiver only operable to receive and process incoming cellular signals from a first emergency response service associated with the first telephone number when activated a first time by pressure upon the first activation button, the receiver only operable to receive and process incoming cellular signals from a second emergency response service associated with the second telephone number when activated a first time by pressure upon the second activation button; and

a microprocessor coupled to the memory device, the cellular transmitter, the cellular receiver, and the first and second activation buttons, the microprocessor only operable when activated by pressure upon the first or second activation button, the microprocessor for accessing the memory device, retrieving the first telephone number, and providing the first telephone number to the cellular transmitter when activated by pressure upon the first activation button, and for accessing the memory device, retrieving the second telephone number, and providing the second telephone number to the cellular transmitter when activated by pressure upon the second activation button.

17. The emergency cellular telephone of claim 16 further comprising:  
the microprocessor for controlling the cellular receiver based on execution of a first or a second set of operational instructions;  
the cellular receiver for scanning for a strongest cellular signal from among available cellular system channels based on the first set of operational instructions executed by the microprocessor when the first activation button is pressed; and  
the cellular receiver for scanning for a strongest cellular signal from among available cellular system channels based on the second set of operational instructions executed by the microprocessor when the second activation button is pressed.
18. The emergency cellular telephone of claim 17 further comprising the microprocessor and receiver for determining a strongest B cellular signal from among cellular signals found in B cellular system channels when the first or second activation button is pressed the first time, for determining whether the strongest B cellular signal has a signal strength greater than a minimum threshold, and for determining a strongest A cellular signal from among cellular signals found in A cellular system channels when the strongest B cellular signal has a signal strength less than the minimum threshold.
19. The emergency cellular telephone of claim 17 further comprising the microprocessor and receiver for determining a strongest A cellular signal from among cellular signals found in A cellular system channels when the first or second activation button is pressed the first time, for determining whether the strongest A cellular signal has a signal strength greater than a minimum threshold, and for determining a strongest B cellular signal from among

cellular signals found in B cellular system channels when the strongest A cellular signal has a signal strength less than the minimum threshold.

20. The emergency cellular telephone of claim 16 further comprising:

the first activation button for causing the emergency cellular telephone to terminate communication with the first emergency response service when the first activation button is pressed a second time that is subsequent to the first time; and

5 the second activation button for causing the emergency cellular telephone to terminate communication with the second emergency response service when the second activation button is pressed a second time that is subsequent to the first time.



## EMERGENCY PHONE WITH ALTERNATE NUMBER CALLING CAPABILITY

### ABSTRACT

An emergency-use-only cellular phone provides for contacting and establishing full-duplex voice communication with emergency personnel at either a public emergency response service or a private roadside assistance service. The phone automatically places a cellular call to the public emergency response service with a single press of a first activation button, and to the private roadside assistance service with a single press of a second activation button. When either activation button is pressed, the following functions are initiated: (1) electrical power from a power supply is provided to a cellular transmitter and receiver, (2) the cellular receiver is activated to search for an available channel from among A or B cellular system channels, (3) an emergency telephone number corresponding to the selected service is accessed from memory, and (4) the cellular transmitter is activated to establish communication with the selected emergency response service. Since all of these functions are initiated by pressing one button, communication with the selected emergency response service may be established simply and speedily, even under stressful conditions. The phone may include a modular GPS receiver unit for providing location information to the public emergency response service or a private roadside assistance service.

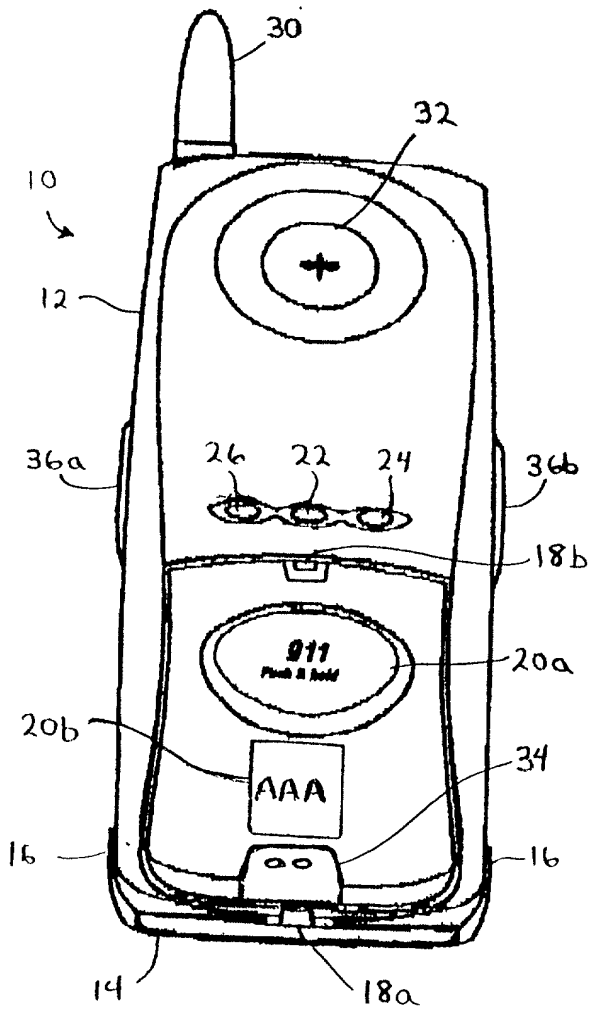


FIG. 1

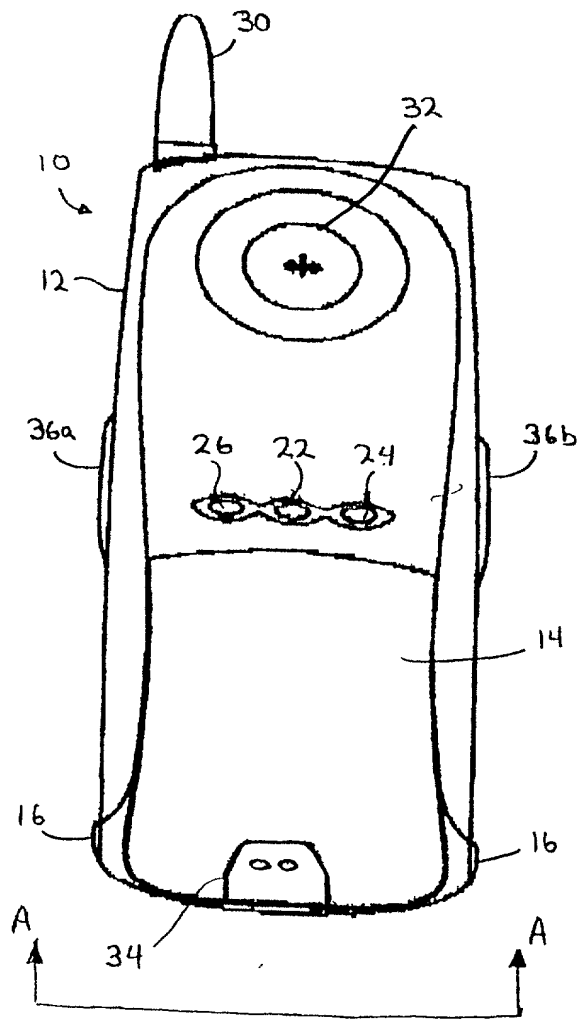


FIG. 2

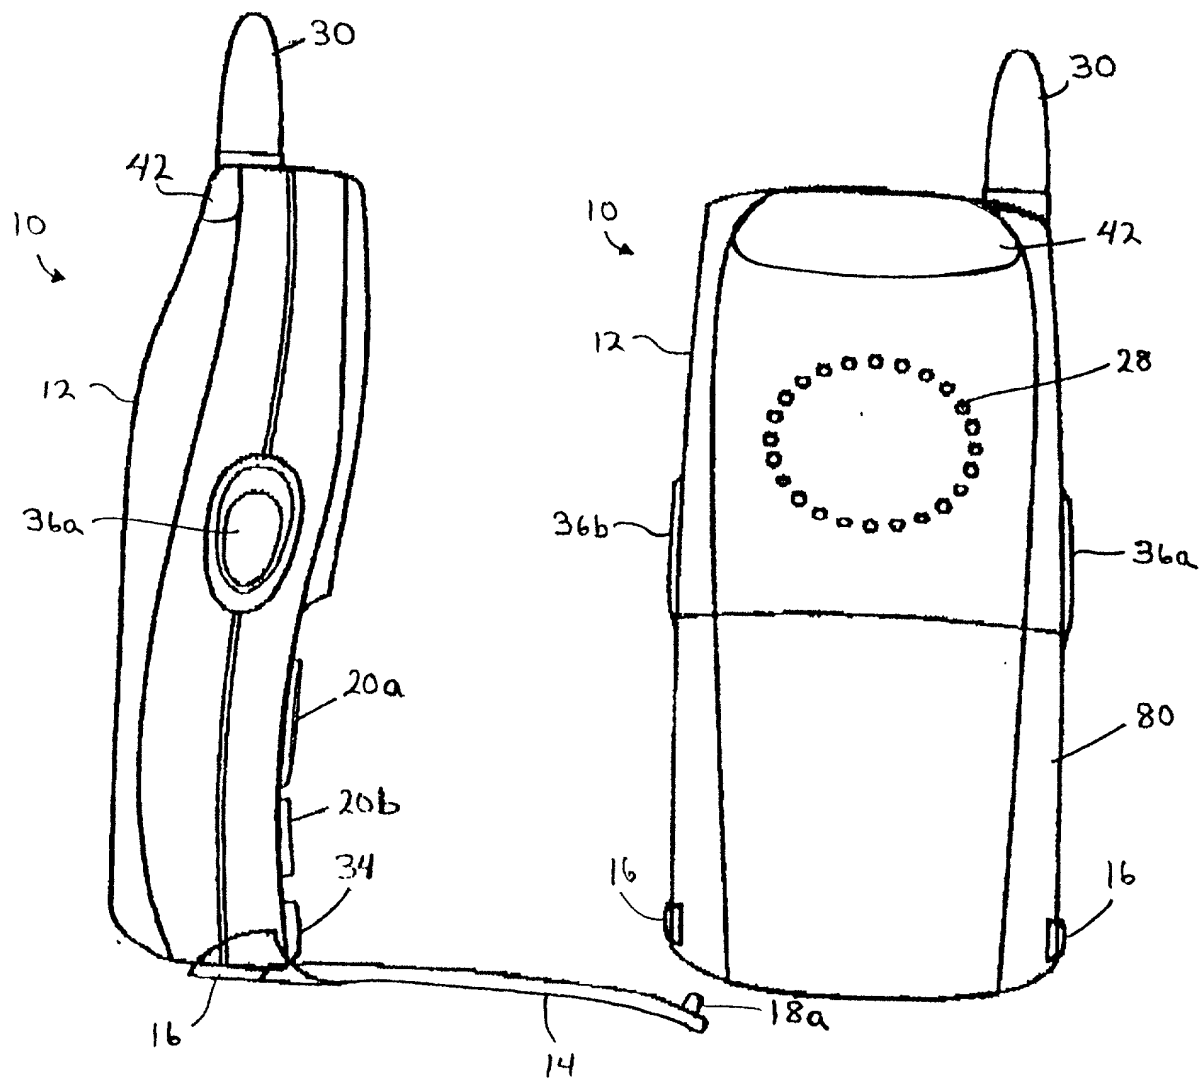


FIG. 3

FIG. 4

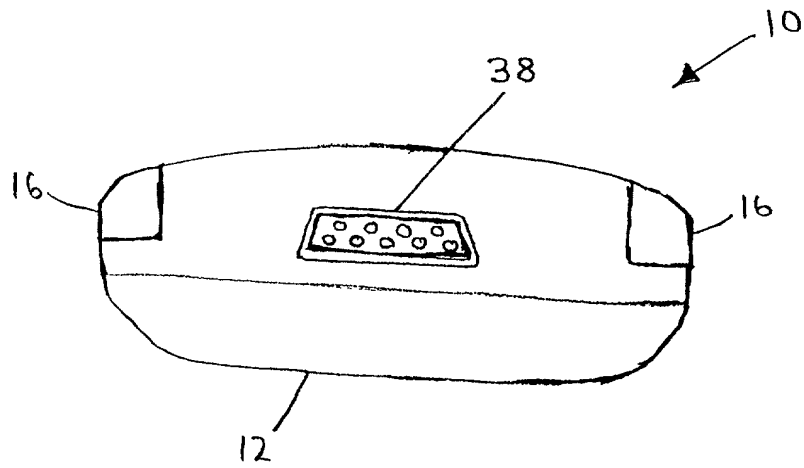


FIG. 5


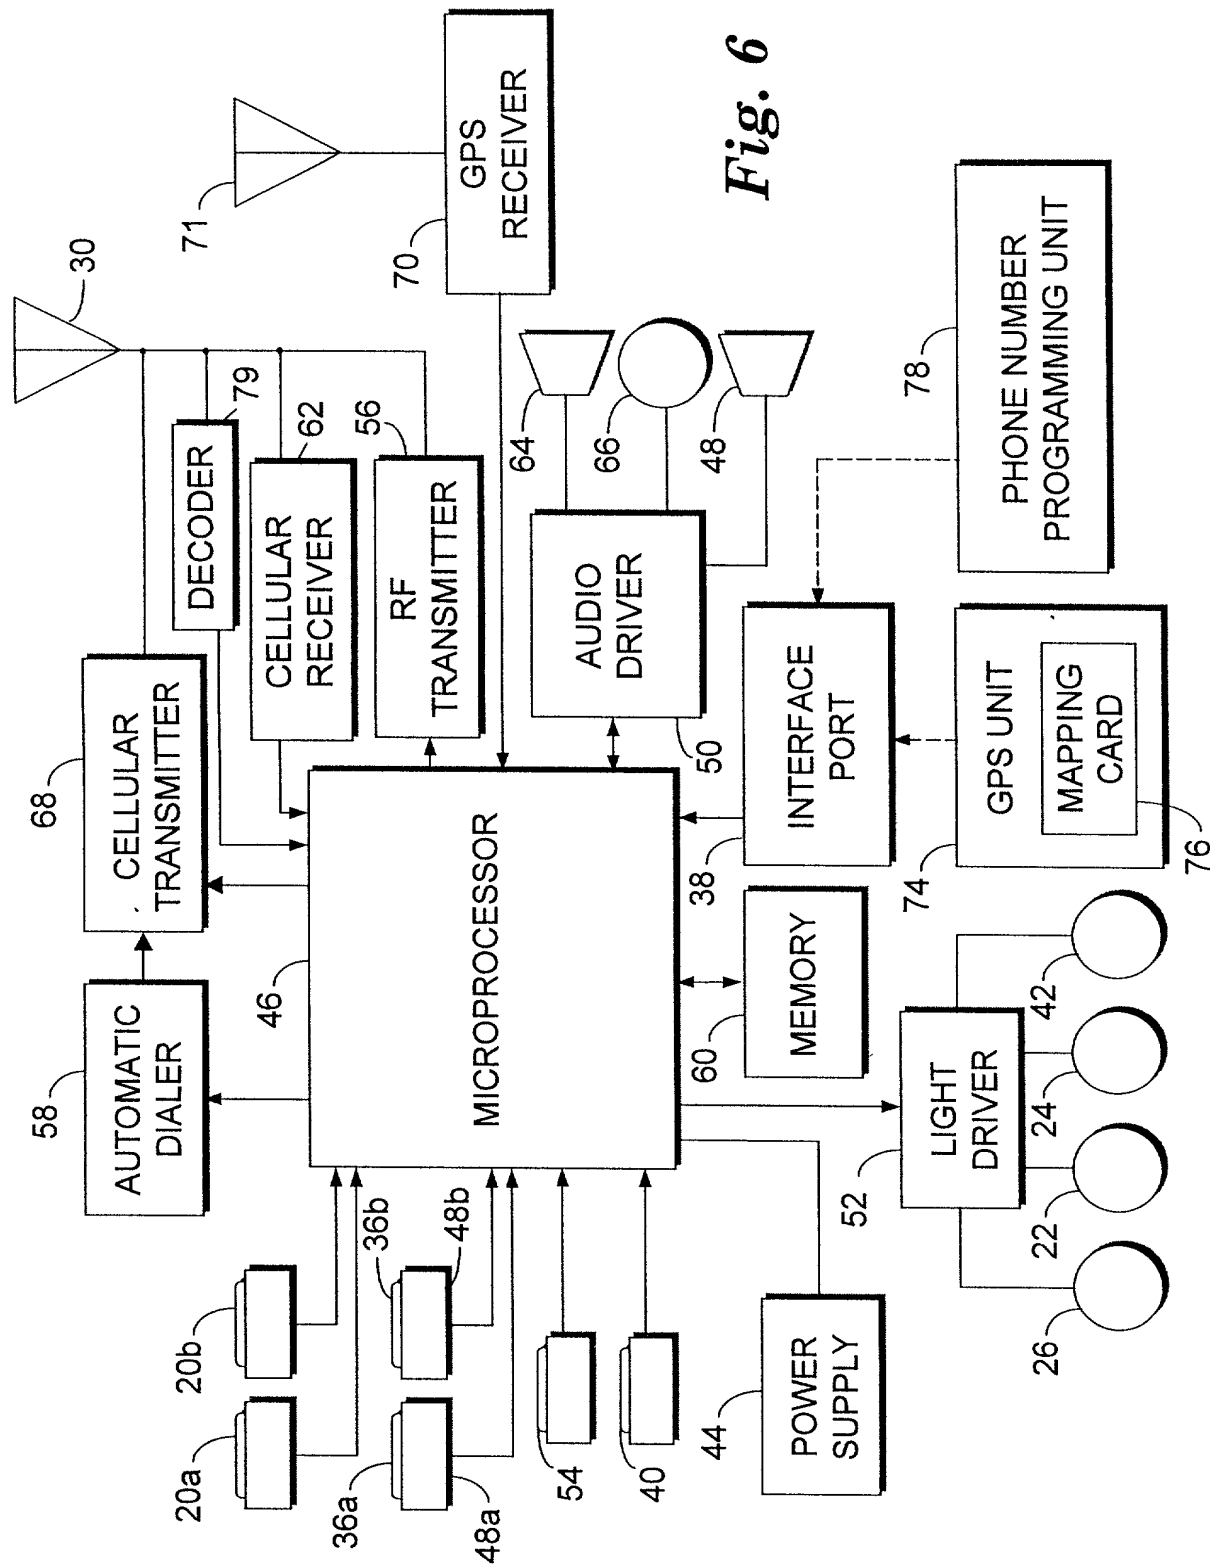


Fig. 6


```

graph TD
    100[Open protective cover] --> 102([Press activation button for at least one second to initiate call])
    102 --> 104[Close protective cover optional]
    104 --> 106[Power-up system components]
    106 --> 108[Retrieve system parameters from memory]
    108 --> 110[Scan B system channels]
    110 --> 112{Signal of sufficient strength found?}
    112 -- yes --> 120[Illuminate high signal indicator light]
    112 -- no --> 114[Scan A system channels]
    114 --> 118{Signal of sufficient strength found?}
    118 -- yes --> 120
    118 -- no --> 116[Illuminate low signal indicator light]
    116 --> 110
    120 --> 122[Select channel having highest signal strength]
    122 --> A((A))
  
```

**Fig. 7A**

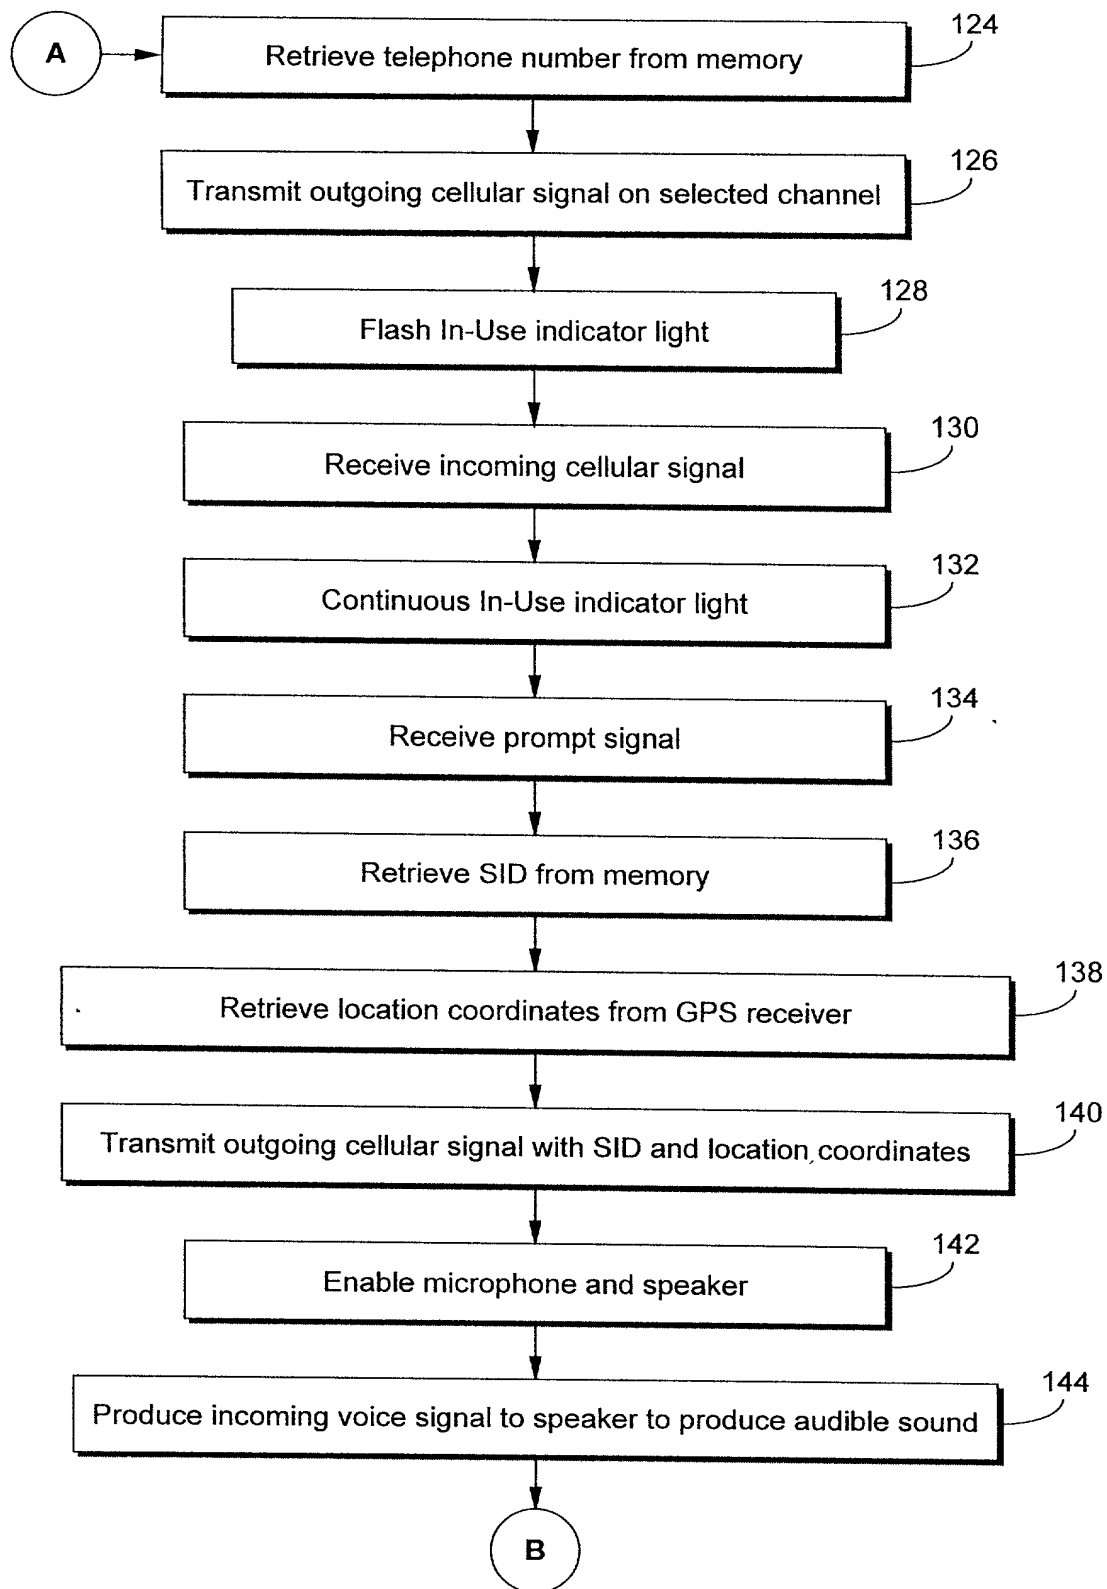


**Fig. 7B**

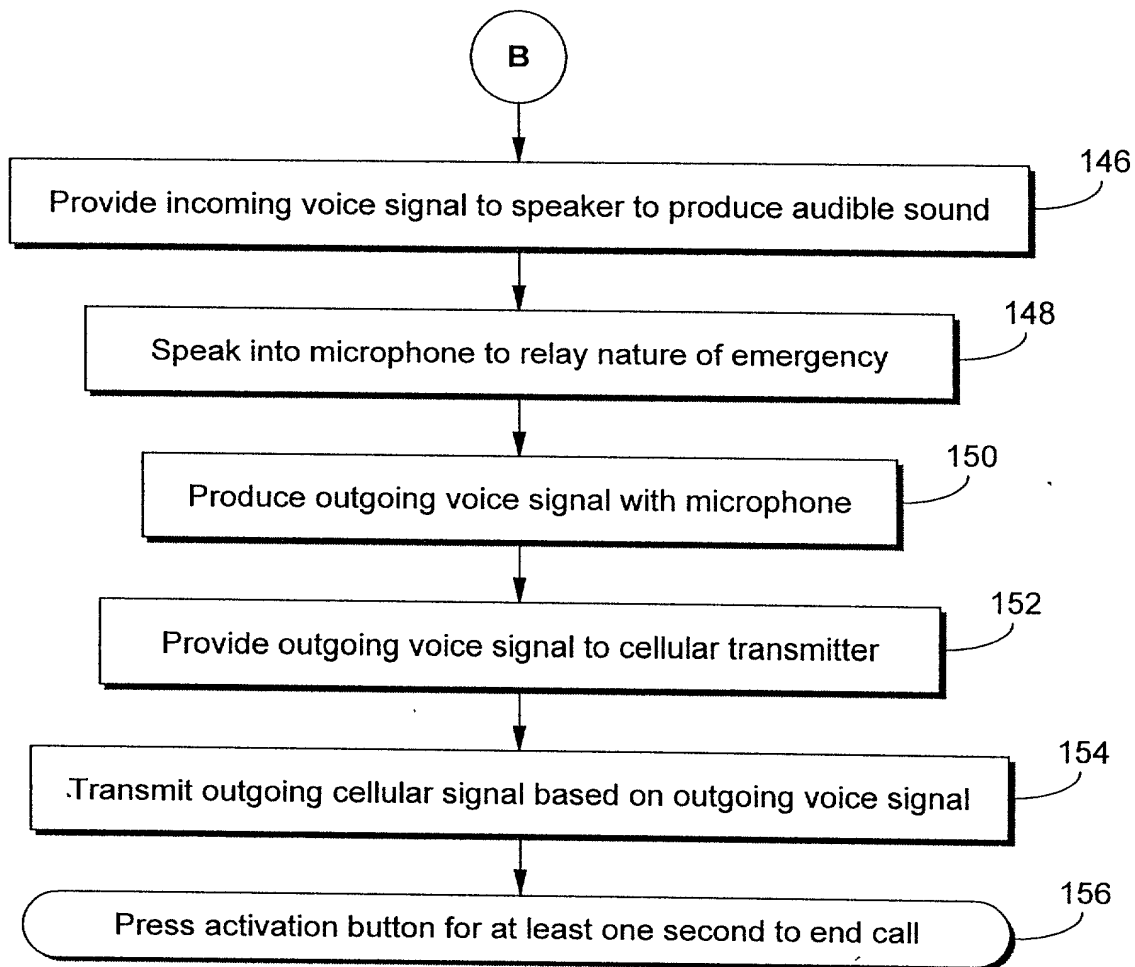

***Fig. 7C***



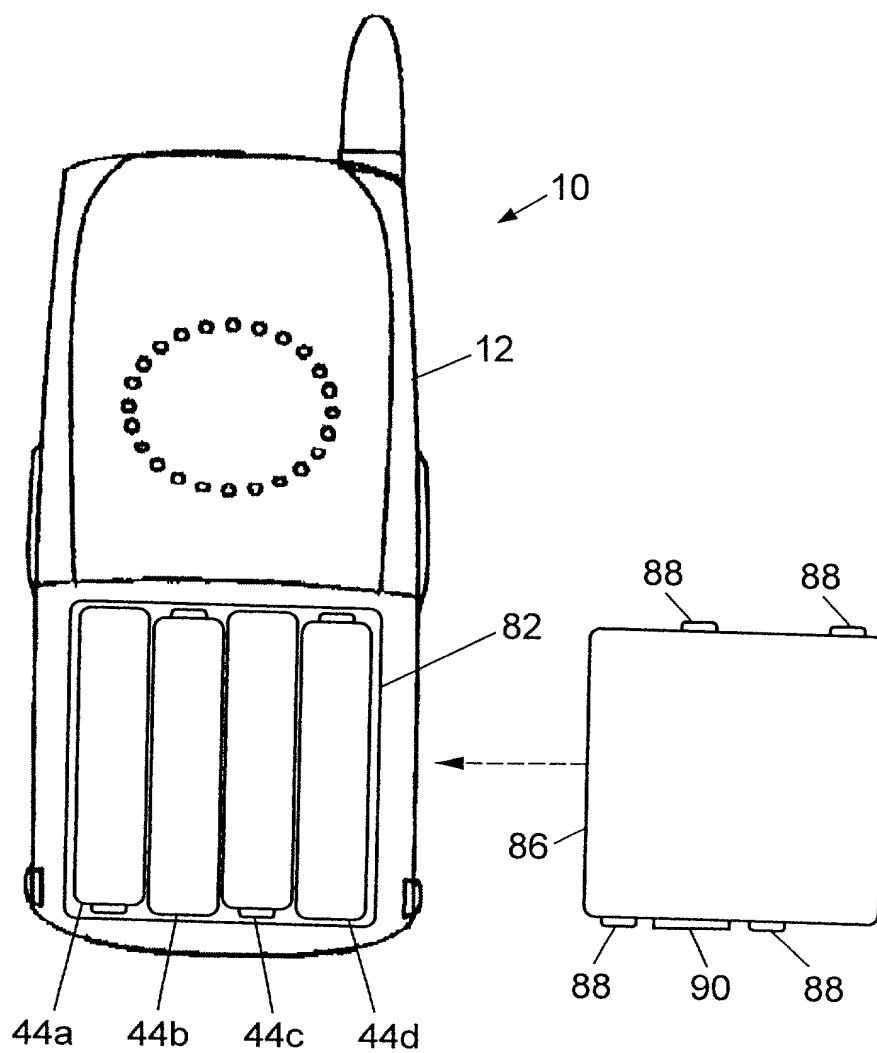

*Fig. 8*

**Fig. 9**

## DECLARATION FOR PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

### EMERGENCY PHONE WITH ALTERNATE NUMBER CALLING CAPABILITY,

the specification of which is attached hereto unless the following box is checked:

☐ was filed on as United States Application No. or PCT International Application No. and was amended on (if applicable).

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56.

I hereby claim foreign priority benefits under 35 U.S.C. § 119(a)-(d) or § 365(b) of any foreign application(s) for patent or inventor's certificate, or § 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

Prior Foreign Application(s)

Priority Not Claimed

(Number)

(Country)

(Day/Month/Year Filed)

☐

(Number)

(Country)

(Day/Month/Year Filed)

☐

I hereby claim the benefit under 35 U.S.C. 119(e) of any United States provisional application listed below.

(Application Number)

(Filing Date)

I hereby claim the benefit under 35 U.S.C. § 120 of any United States application(s), or § 365(c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of 35 U.S.C. § 112, I acknowledge the duty to disclose information which is material to patentability as defined in 37 CFR § 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of this application.

09/538,364

March 29, 2000

Pending

(Application Number)

(Filing Date)

(Status--patented, pending, abandoned)

(Application Number)

(Filing Date)

(Status--patented, pending, abandoned)

I hereby appoint the following attorneys to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith:

Mark S. Graham, Reg. No. 32,355  
Andrew S. Neely, Reg. No. 28,979  
Robert O. Fox, Reg. No. 34,165  
David E. LaRose, Reg. No. 34,369

Michael E. Sellers, Reg. No. 39,831  
Richard W. Barnes, Jr., Reg. No. 39,596  
Jason L. Hornkohl, Reg. No. 44,777

Address all telephone calls to **Andrew S. Neely** at telephone number (865) 546-4305.


Address all correspondence to: Customer No. 000408.

Andrew S. Neely  
LUEDEKA, NEELY & GRAHAM, P.C.  
P. O. Box 1871  
Knoxville, TN 37901.

I hereby authorize the attorney(s) or agent(s) named herein to accept and follow instructions from **AMERICAN SECURE CARE, LLC** as to any action to be taken in the Patent and Trademark Office regarding this application without direct communication between the attorney(s) or agent(s) and myself. In the event of a change in the persons from whom instructions may be taken, the U.S. attorney(s) or agent(s) named herein will be so notified by me.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of sole or first inventor (given name, family name): **Brian M. Boling**

Inventor's signature 


Date 10/10/2000

Residence: 2404 Keller Bend Road, Knoxville, TN 37922

Citizenship: US

Post Office Address: 2404 Keller Bend Road  
Knoxville, TN 37922

Full name of second joint inventor (given name, family name): **Michael C. Bernstein**

Second Inventor's signature 


Date 10/10/00

Residence: 236 Treyburn, Knoxville, TN 37922

Citizenship: US

Post Office Address: 236 Treyburn  
Knoxville, TN 37922

Full name of third joint inventor (given name, family name): **Nicholas A. Natale**

Third Inventor's signature 

Date 10/10/2000

Residence: 8819 Lennox View Way, Knoxville, TN 37923

Citizenship: US

Post Office Address: 8819 Lennox View Way  
Knoxville, TN 37923